


# A K INDUSTRIAL FABRICS

## TECHNICAL SPECIFICATION AKIF - 14 PC



TEST	RESULT	UNIT	TEST METHOD
<b>FABRIC PROPERTIES</b>			
Fiber Content	50 : 50 PC	%	ISO 1833-1 : 2006
Warp/Weft Yarn	Ringspun		
Weight	450	GSM	ISO 3801 : 1997
<b>TENSILE STRENGTH</b>			
Warp	2146	N	ISO 13934-2 : 2014
Weft	1650	N	
<b>TEAR STRENGTH</b>			
Warp	155	N	ISO 13937-1 : 2000
Weft	95	N	
<b>RUBBING FASTNESS</b>			
Dry	3-4	GRADE	ISO 105 C06 : 2010
Wet	3-4	GRADE	
<b>SHRINKAGE</b>			
Warp	1.00	%	ISO 6330 : 2012
Weft	0.50	%	
<b>WATER PROOF TEST</b>			
Spray Rating	90	%	ISO 7771
Cone Test	No Drop	24 Hrs.	
Water Column	280	MM	ISO 811 : 2018
<b>LIGHT FASTNESS</b>			
Light Fastness	4-5	GRADE	ISO 105-B02 : 2013
<b>ANTIFUNGUS TEST</b>			
Fabric passes Soil Burial Test (SO 11721 - 1:2001)& Aspergillus Niger Test (ISO 14119)			
<b>WIDTH</b>	Upto 200 CMS		

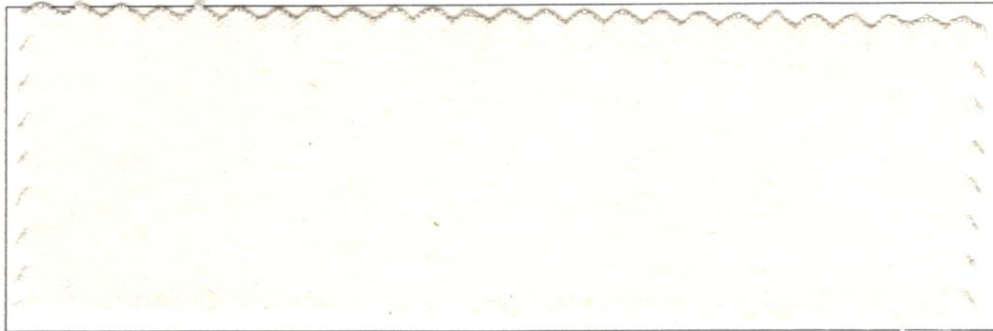


- The Technical specifications mentioned above are average and are therefore susceptible to change..
- The Color swatches are only indicative and not binding.



OLIVE GREEN



BEIGE




TAN



KHAKI



WHITE




GREY




BROWN



RED



ORANGE



P. GREEN