


A K INDUSTRIAL FABRICS


TECHNICAL SPECIFICATION AKIF - 13 PC RS



TEST	RESULT	UNIT	TEST METHOD
FABRIC PROPERTIES			
Fiber Content	50 : 50 PC	%	ISO 1833-1 : 2006
Warp/Weft Yarn	Ringspun		
Weight	480	GSM	ISO 3801 : 1997
			ISO 13934-2 : 2014
TENSILE STRENGTH			
Warp	2350	N	
Weft	1700	N	
			ISO 13937-1 : 2000
TEAR STRENGTH			
Warp	198	N	
Weft	165	N	
			ISO 105 C06 : 2010
RUBBING FASTNESS			
Dry	3-4	GRADE	
Wet	3-4	GRADE	
			ISO 6330 : 2012
SHRINKAGE			
Warp	1.50	%	
Weft	0.50	%	
WATER PROOF TEST			
Spray Rating	95	%	ISO 7771
Cone Test	No Drop	24 Hrs.	
Water Column	400	MM	ISO 811 : 2018
LIGHT FASTNESS			
Light Fastness	4-5	GRADE	ISO 105-B02 : 2013
ANTIFUNGUS TEST			
Fabric passes Soil Burial Test (SO 11721 - 1:2001)& Aspergillus Niger Test (ISO 14119)			
WIDTH	Upto 200 CMS		

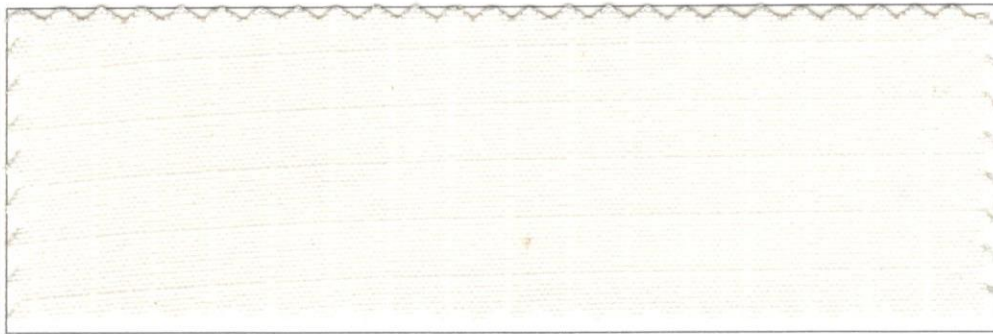

- The Technical specifications mentioned above are average and are therefore susceptible to change..
- The Color swatches are only indicative and not binding.



OLIVE GREEN




BEIGE




TAN



KHAKI



WHITE




GREY



BROWN



RED



ORANGE



P. GREEN