


A K INDUSTRIAL FABRICS

TECHNICAL SPECIFICATION AKIF - 11 PC



TEST	RESULT	UNIT	TEST METHOD
FABRIC PROPERTIES			
Fiber Content	30 : 70 PC	%	ISO 1833-1 : 2006
Warp/Weft Yarn	Open end		
Weight	350	GSM	ISO 3801 : 1997
TENSILE STRENGTH			
ISO 13934-2 : 2014			
Warp	956	N	
Weft	820	N	
TEAR STRENGTH			
ISO 13937-1 : 2000			
Warp	64	N	
Weft	43	N	
RUBBING FASTNESS			
ISO 105 C06 : 2010			
Dry	3-4	GRADE	
Wet	3-4	GRADE	
SHRINKAGE			
ISO 6330 : 2012			
Warp	1.00	%	
Weft	0.50	%	
WATER PROOF TEST			
Spray Rating	85	%	ISO 7771
Cone Test	No Drop	24 Hrs.	
Water Column	230	MM	ISO 811 : 2018
LIGHT FASTNESS			
Light Fastness	4-5	GRADE	ISO 105-B02 : 2013
ANTIFUNGUS TEST			
Fabric passes Soil Burial Test (SO 11721 - 1:2001)& Aspergillus Niger Test (ISO 14119)			
WIDTH	Upto 200 CMS		

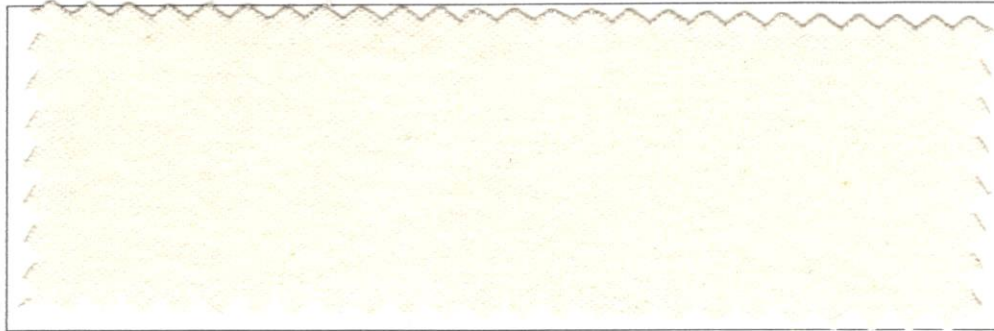

- The Technical specifications mentioned above are average and are therefore susceptible to change..
- The Color swatches are only indicative and not binding.

